

NorBat standard Serie

LFP12134 T11 - 12V 134 Ah



Nominell spenning		12 V
Kapasitet (10 timer, 25°C)		134 Ah
Design life		10 - 12 års
Tiltrekningsmoment		12 Nm
Dimensjon	Lengde	342 ±2 mm
	Bredde	172 ±2 mm
	Høyde	280 ±2 mm
	Total høyde	285 ±2 mm
Ca. vekt		42 kg ±4%


Utladekarakteristikk (A, 25 °C):

FV/TID	15 min	30 min	60 min	2 t	3 t	4 t	5 t	6 t	8 t	10 t	20 t
9.60 V	221	134	83.1	49.0	34.2	28.0	23.9	20.9	16.4	13.6	7.16
9.90 V	216	131	81.8	48.7	34.0	27.9	23.8	20.8	16.3	13.6	7.15
10.2 V	208	127	79.8	48.2	33.7	27.7	23.6	20.6	16.2	13.6	7.13
10.5 V	201	124	78.2	47.5	33.5	27.5	23.5	20.5	16.1	13.5	7.08
10.8 V	190	120	75.8	46.3	32.5	26.6	22.7	19.9	15.6	13.4	7.04

Utladekarakteristikk (Watt, 25 °C):


FV/TID	15 min	30 min	60 min	2 t	3 t	4 t	5 t	6 t	8 t	10 t	20 t
9.60 V	2 428	1 503	947	567	402	330	283	247	195	163	85.9
9.90 V	2 369	1 473	933	564	399	328	281	246	194	163	85.8
10.2 V	2 282	1 428	909	559	397	325	279	244	192	162	85.5
10.5 V	2 204	1 394	891	550	394	323	277	242	191	161	85.0
10.8 V	2 088	1 343	864	536	382	313	269	235	185	160	84.4

Dimensjon (mm):

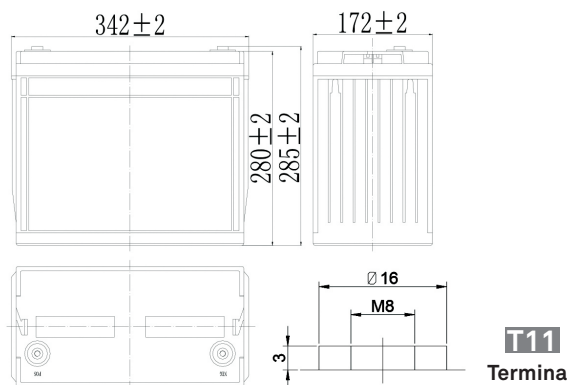

Indre motstand (Fullt ladet 25 °C)		Ca. 3.8mΩ
Kapasitet influert av temperatur (10 timer)	40 °C	102 %
	25 °C	100 %
	0 °C	85 %
	-15 °C	65 %
Selvutladning (25 °C)	3 måneder	Restkapasitet: 91 %
	6 måneder	Restkapasitet: 82 %
	12 måneder	Restkapasitet: 65 %
Nominell driftstemperatur		25 °C ±3 °C
Driftstemperatur intervall		-15 °C - +50 °C
Ladespenning (float)		13.50 til 13.80 V
Ladespenning (cyklisk)		14.50 til 14.90 V
Maks ladestrøm		40.2 A
Terminalmaterialet		kobber
Maks utladestrøm		1050 A (5 sek.)

Utladekarakteristikk (25 °C)

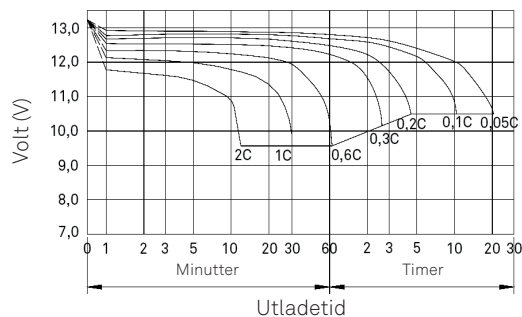

Ladekarakteristikk (25 °C)

